



QUICK REFERENCE GUIDE

Discover the right EnerSys® batteries
for your power and utilities network



PowerSafe
SBS XL

SBS XL 1500

Nominal capacity Capacité nominale
24 1500Ah @ 20°C (1 80kWh @ 20°C)
24 1500Ah @ 25°C (1 750kWh @ 25°C)

Float voltage Tension de floatage
2.28V/cell @ 20°C (84.7V)
2.275V/cell @ 25°C (83.7V)

Connection torque Couple de serrage
28 in-lb (3.15 Nm) @ 20°C

Typical weight Poids moyen
93.5 kg - 206.1 lbs

Non-Spillable Battery Made in FR

EnerSys

www.enerSys.com

PowerSafe
OPZS

MIN
MAX

OPZS 1500

24 1500Ah @ 20°C (1 80kWh @ 20°C)
24 1500Ah @ 25°C (1 750kWh @ 25°C)

Float voltage Tension de floatage
2.28V/cell @ 20°C (84.7V)
2.275V/cell @ 25°C (83.7V)

Connection torque Couple de serrage
28 in-lb (3.15 Nm) @ 20°C

Typical weight Poids moyen
93.5 kg - 206.1 lbs

Non-Spillable Battery Made in FR

EnerSys

www.enerSys.com

Recycling symbols: crossed-out wheeled bin, recycling symbol, Pb, and other safety icons.

OPZS 1500

24 1500Ah @ 20°C (1 80kWh @ 20°C)
24 1500Ah @ 25°C (1 750kWh @ 25°C)

Float voltage Tension de floatage
2.28V/cell @ 20°C (84.7V)
2.275V/cell @ 25°C (83.7V)

Connection torque Couple de serrage
28 in-lb (3.15 Nm) @ 20°C

Typical weight Poids moyen
93.5 kg - 206.1 lbs

Non-Spillable Battery Made in FR

EnerSys

www.enerSys.com



WHY ENERSYS®

OPTIMIZE TIME AND MAINTENANCE COSTS IN YOUR INDUSTRIAL PLANTS

When it comes to the power protection of sensitive equipment, no company can afford to leave its assets unprotected. Even short outages can trigger responses that leave essential equipment inactive for long periods, causing process instability or expensive system damage.

Availability is everything, even in the harshest environments and extremes of temperature.

Having sufficient high-quality, reliable battery power backup in non-cyclic stable grid float applications, acting as the primary energy storage and release source for UPS systems, is essential in case of an outage from the grid. As the operational pressures and resource constraints become ever more acute, the need for batteries with stronger performance characteristics continues to rise.



NATIONWIDE SERVICE & SUPPORT

24/7 COVERAGE FROM 300+ AUTHORIZED SERVICE TECHNICIANS

TURNKEY SOLUTIONS PROVIDER TO MEET YOUR REQUIREMENTS

COMPREHENSIVE MAINTENANCE REPORTING AND MONITORING PLANS

COMPLIANCE WITH ENVIRONMENTAL AND RECYCLING REQUIREMENTS



From initiation to end-of-life, EnerSys® delivers global support for your backup power needs. Our sales and service specialists are ideally positioned to support your projects from conception and installation to on-site maintenance and after-sales service, helping you to maximize availability and lower through-life costs.



LEARN ABOUT OUR COMMITMENT



ADVANCED TECHNOLOGY FOR

A UTILITIES WORLD THAT NEVER SLEEPS

Our full range of battery chemistries is unparalleled. From Valve Regulated Lead Acid (VRLA) batteries featuring advanced Thin Plate Pure Lead (TPPL) technology, to the industry's broadest range of flooded batteries, nickel cadmium and other emerging technologies, EnerSys® delivers the most effective, powerful and reliable batteries available. With a full range of racks, cabinets and accessories available, a complete integrated system can be offered for any application.

THE US WILL ADD
85 GW
OF BATTERY ENERGY STORAGE
BY 2035*

THE MOST IMPORTANT PART OF YOUR BACKUP POWER INFRASTRUCTURE IS THE ENERGY STORAGE SYSTEM THAT POWERS IT.

ENERSYS® HELPS PARTNERS OVERCOME THESE CHALLENGES WITH A WORLDWIDE FOOTPRINT AND LOCAL INFRASTRUCTURE.



POWERSAFE® VENTED LEAD-ACID (VLA) BATTERIES



SCAN ME




SCAN ME

POWERSAFE® VENTED LEAD-ACID (VLA) BATTERIES



POWERSAFE® RECOMBINANT NICKEL CADMIUM (NICD) BATTERIES




SCAN ME



POWERSAFE® VENTED NICKEL CADMIUM (NICD) BATTERIES



SCAN ME

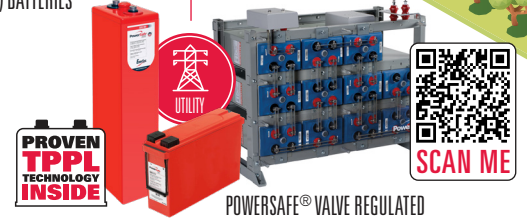

POWERSAFE® VALVE REGULATED LEAD ACID (VRLA) BATTERIES



SCAN ME



GENERATOR START BATTERIES



SCAN ME



* Source: S&P Global Market Intelligence - Charging Up On Battery Energy Storage 101 US Market Outlook



	Product	Utility	Class 1E Nuclear	Capacity Range Ampere hours @ 5 hr rate to 1.00 VPC @ 68 °F (20 °C)	Nominal Voltage	Plate Technology	Terminal Location	Design Life @ 77 °F (25 °C) in Float Service
POWERSAFE® VENTED NICKEL CADMIUM (NICK) BATTERIES	RL	●	○	11-1700	1.2	Pocket Plate	Top	25 Years
	RM	●	○	11-1390	1.2	Pocket Plate Top	Top	25 Years
	RH	●	○	10-800	1.2	Pocket Plate	Top	25 Years
POWERSAFE® RECOMBINANT NICKEL CADMIUM (NICK) BATTERIES	VGL	●	○	12-1570	1.2	Pocket Plate	Top	25 Years
	VGM	●	○	11-1350	1.2	Pocket Plate	Top	25 Years

	Product	Utility	Class 1E Nuclear	Capacity Range Ampere hours @ 8 hr rate to 1.75 VPC @ 77 °F (25 °C)	Nominal Voltage	Plate Technology	Terminal Location	Design Life @ 77 °F (25 °C) in Float Service
POWERSAFE® VALVE REGULATED LEAD ACID (VRLA) BATTERIES	DDmP	●	○	200-2000	2.4	Flat Plate Lead Calcium	Top/Front	20 Years
	SBS XL 2V	●	○	320-3900	2	Thin Plate Pure Lead (TPPL)	Top/Front	20 Years
	SBS 12V	●	○	31-206	12	Thin Plate Pure Lead (TPPL)	Front	10+ Years
	GN	○	●	1140-3600	2.4	Flat Plate Lead Calcium	Top	25 Years
	GC-M	●	○	875-3550	2.4	Flat Plate Lead Calcium	Top	25 Years
	DSG	●	○	295-1600	4.8	Flat Plate Lead Calcium	Top	20 Years
	ESG	●	○	187-935	2.4	Flat Plate Lead Calcium	Top	20 Years
	EC-M	●	○	215-850	2	Flat Plate Lead Calcium	Top	20 Years
	CC-M	●	○	50-200	6	Flat Plate Lead Calcium	Top	20 Years
	OPzS	●	○	217-3543	2	Tubular Plate Low Antimony	Top	20 Years
POWERSAFE® VENTED LEAD ACID (VLA) BATTERIES	OGi	●	○	56-281	6, 12	Rod Plate Low Antimony	Top	20 Years

DISCOVER MORE ABOUT TPPL

BATTERY EVOLUTION

DOES YOUR NETWORK NEED AN UPGRADE?

Thin Plate Pure Lead (TPPL) is a well-established battery technology that has proven itself in service conditions and is trusted in a wide array of applications including Industrial Power and Utility. The selection of high-purity and high-grade materials contributes to a longer shelf life, lower OPEX/ improved TCO, an extended service life, and more reliable performance.

So what exactly is TPPL, and how does it fit in with the ongoing evolution of the lead-acid battery? The advantages that can be derived from use of this technology are covered in our website White Paper and Case Study examples.

The next era for standby float.

WHITE PAPER

READ ME

CASE STUDY

READ ME

Ensuring power continuity.

Gen Set batteries with TPPL technology are also available in established 4D, 8D, Group 31 and Group 34 sizes.

ARE YOU READY TO BUY?



**ARE YOU
READY
TO BUY?**

www.enersys.com



World Headquarters
2366 Bernville Road
Reading, PA 19605 USA
+1 610-208-1991 / +1 800-538-3627

EnerSys EMEA
EH Europe GmbH
Baarerstrasse 18
6300 Zug Switzerland

EnerSys APAC
No. 85, Tuas Avenue 1
Singapore 639518
+65 6558 7333



For more information visit www.enersys.com

© 2024 EnerSys. All Rights Reserved. Trademarks and logos are the property of EnerSys and its affiliates unless otherwise noted. Subject to revisions without prior notice. E.&O.E.